

FEATURES & SPECIFICATIONS

INTENDED USE

White thermoplastic emergency unit.

CONSTRUCTION

Injection-molded, flame-retardant, high-impact, thermoplastic housing with snap-fit design components for easy installation. Universal J-box pattern. Track and swivel arrangement permits full range of lamp adjustment. Not intended for ceiling mounting.

OPTIC

Two 5.4W DC T5 wedge-base lamps for emergency light.

ELECTRICAL

Dual-voltage input 120V or 277V AC. Emergency unit provided with test switch, status indicator and rechargeable battery. Maintenance-free battery provides 90 minutes of emergency power.

LISTING

UL Listed. Meets UL 924, NFPA 101, NFPA 70-NEC and OSHA illumination standards. Indoor damp location (10°C to 40°C) listed standard.

WARRANTY


Fixtures are covered by Lithonia Lighting 24-month warranty against mechanical defects in manufacture.

All life safety equipment, including emergency lighting for path of egress must be maintained, serviced, and tested in accordance with all National Fire Protection Association (NFPA) and local codes. Failure to perform the required maintenance, service, or testing could jeopardize the safety of occupants and will void all warranties.

Catalog Number
Notes
Type

Contractor Select

UNITS

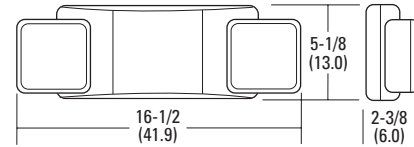

Max. weight: 4 lbs (1.8 kg)

All dimensions are inches (centimeters).

ORDERING INFORMATION

Catalog Number	UPC	Description	Voltage	Wattage ¹	Pallet Qty.	Standard Carton Qty.
EU2 M6	745973432020	Emergency lighting unit	6	5.4	180	6

Accessories: Order as separate items.	
ELA WG3	Wireguard (back mount only) ²

Notes

- Per lamp head.
- See spec sheet [ELA-WG](#).

