

## FEATURES & SPECIFICATIONS

### INTENDED USE

White thermoplastic emergency exit/unit combo.

### CONSTRUCTION

Injection-molded, flame-retardant, high-impact, thermoplastic housing with snap-fit design components for easy installation. Universal J-box pattern. Universal chevrons are easily removed for directional indication. Fully assembled single face with extra faceplate for easy field-conversion to double face. Track and swivel arrangement permits full range of lamp adjustment.

Letters 6" high with 3/4" stroke, with 100 ft viewing distance rating.

### OPTICS

LED expected life is up to 10 years. Two 5.4W DC T5 wedge-base lamps for emergency light. High-output option yields 12W extra capacity.

### ELECTRICAL

Dual-voltage input 120V or 277V AC; 6V output. Emergency combo provided with test switch, status indicator and rechargeable battery. Maintenance-free battery provides 90 minutes of emergency power.

### LISTINGS

UL Listed. Meets UL 924, NFPA 101, NFPA 70-NEC and OSHA illumination standards. Indoor damp location (20°C to 40°C) listed standard.

### WARRANTY


Fixtures are covered by Lithonia Lighting 24-month warranty against mechanical defects in manufacture.

All life safety equipment, including emergency lighting for path of egress must be maintained, serviced, and tested in accordance with all National Fire Protection Association (NFPA) and local codes. Failure to perform the required maintenance, service, or testing could jeopardize the safety of occupants and will void all warranties.

Catalog Number
Notes
Type

Contractor Select

# Exit/Unit Combos

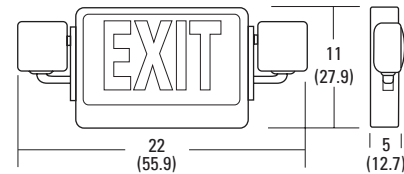

All dimensions are inches (centimeters).  
Shipping weight: 3.6 lbs. (1.6 kgs.).

### ORDERING INFORMATION

Catalog Number	UPC	Description	Voltage	Wattage <sup>1</sup>	Pallet Qty.	Standard Carton Qty.
ECR M6	745973431832	Red	120/277	5.4	72	6
ECG M6	745973431894	Green	120/277	5.4	72	6
ECR HO M6	745974173663	Red, high output	120/277	5.4	72	6
ECG HO M6	745976561604	Green, high output	120/277	5.4	72	6

<b>Accessories:</b> Order as separate catalog number.	
ELA WG3	Wireguard (back mount only) <sup>2</sup>

### Notes

- Per lamp head.
- See spec sheet [ELA-WG](#).

